

BCI GROUP SIZE	TYPE	VOLTAGE	CAPACITY ^A Minutes	CAPACITY ^B Amp-Hours (AH)			KILOWATT (kWh)	TERMINAL Type	DIMENSIONS ^C Inches (mm)			WEIGHT lbs. (kg)
			@25 Amps	5-Hr Rate	20-Hr Rate	100-Hr Rate			100-Hr Rate	Length	Width	
DEEP-CYCLE GEL BATTERIES												
GC2	6V-GEL	6 VOLT	394	154	189	198	1.19	7	10-1/4 (260)	7-1/8 (181)	10-7/8 (276)	68 (31)
DIN	TE35-GEL	6 VOLT	-	180	210	220	1.32	5, 8	9-5/8 (244)	7-1/2 (190)	10-7/8 (276)	69 (31)
8D	8D-GEL	12 VOLT	500	188	225	265	3.18	5	21-1/16 (534)	11 (279)	10-13/16 (233)	157 (71)
24	24-GEL	12 VOLT	147	66	77	85	1.02	6, 7	10-7/8 (276)	6-3/4 (171)	9-5/16 (236)	52 (24)
27	27-GEL	12 VOLT	179	76	91	100	1.20	7	12-3/4 (324)	6-3/4 (171)	9-1/4 (234)	63 (29)
31	31-GEL	12 VOLT	200	85	102	108	1.30	7	12-15/16 (329)	6-3/4 (171)	9-5/8 (245)	69 (31)
DIN	5SHP-GEL	12 VOLT	-	110	125	137	1.64	5, 8	13-9/16 (345)	6-3/4 (171)	11-1/8 (283)	85 (39)

BCI GROUP SIZE	TYPE	VOLTAGE	CAPACITY ^A Minutes		CRANKING Performance		CAPACITY ^B Amp-Hours (AH)			KILOWATT (kWh)	TERMINAL Type	DIMENSIONS ^C Inches (mm)			WEIGHT lbs. (kg)
			@25 Amps	@75 Amps	C.C.A. ^D @0°F	C.A. ^E @32°F	5-Hr Rate	20-Hr Rate	100-Hr Rate			100-Hr Rate	Length	Width	
MARINE/RV DEEP CYCLE BATTERIES - with T2 TECHNOLOGY™															
24	SCS150	12 VOLT	150	36	530	650	80	100	-	-	10	11-1/4 (286)	6-3/4 (171)	9-3/4 (248)	50 (23)
27	SCS200	12 VOLT	200	52	620	760	95	115	-	-	10	12-3/4 (324)	6-3/4 (171)	9-3/4 (248)	60 (27)
30H	SCS225	12 VOLT	225	57	665	820	105	130	-	-	10	13-15/16 (355)	6-3/4 (171)	9-7/8 (251)	66 (30)

CYCLING AGM BATTERIES															
24	24-AGM	12 VOLT	137	-	500	600	67	76	84	1.01	6	10-3/4 (274)	6-13/16 (174)	8-11/16 (220)	54 (24)
27	27-AGM	12 VOLT	158	-	550	660	77	89	99	1.19	6	12-9/16 (318)	6-13/16 (174)	8-3/4 (221)	64 (29)
31	31-AGM	12 VOLT	177	-	600	720	82	100	111	1.33	6	13-7/16 (341)	6-13/16 (174)	9-3/16 (233)	69 (31)
31	OverDrive™ AGM 31	12 VOLT	180	-	600	720	84	102	-	-	11	13-7/16 (341)	6-13/16 (174)	9-1/4 (234)	69 (31)


DUAL PURPOSE AGM BATTERIES															
GC2	6V-AGM	6 VOLT	385	-	1100	1400	154	200	221	1.33	6	10-1/4 (260)	7-1/8 (181)	10-3/4 (274)	65 (29)
8D	8D-AGM	12 VOLT	460	-	1450	1850	179	230	254	3.05	6	20-1/2 (521)	10-9/16 (269)	9-3/16 (233)	167 (76)

* Polygon™ Case



- A. The number of minutes a battery can deliver when discharged at a constant rate at 80°F (27°C) and maintain a voltage above 1.75 V/cell. Capacities are based on peak performance.
- B. The amount of amp-hours (AH) a battery can deliver when discharged at a constant rate at 80°F (27°C) for the 20-Hour and 86°F (30°C) for the 5-Hour rate and maintain a voltage above 1.75 V/cell. Capacities are based on peak performance.
- C. Dimensions are based on maximum size. Dimensions may vary depending on type of handle or terminal. Batteries to be mounted with .5 inches (12.7mm) spacing minimum.
- D. C.C.A. (Cold Cranking Amps) - the discharge load in amperes which a new, fully charged battery can maintain for 30 seconds at 0°F at a voltage above 1.2 V/cell.
- E. C.A. (Cranking Amps) - the discharge load in amperes which a new, fully charged battery can maintain for 30 seconds at 32°F at a voltage above 1.2 V/cell. This is sometimes referred to as marine cranking amps @ 32°F or M.C.A. @ 32°F.
- F. Dimensions taken from bottom of the battery to the highest point on the battery. Heights may vary depending on type of terminal.

Terminal Configurations

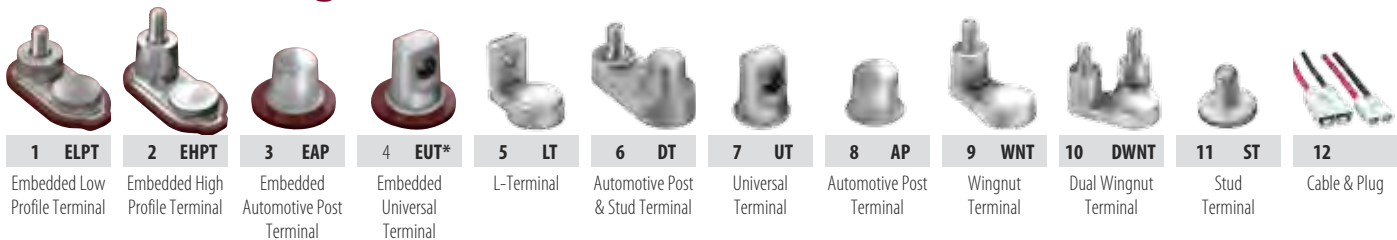

- | | | | | | | | | | | | |
|--|---|---|--|---------------------------|--|-----------------------------------|---|----------------------------------|---|-------------------------------|---------------------------|
| 1 ELPT
Embedded Low Profile Terminal | 2 EHPT
Embedded High Profile Terminal | 3 EAP
Embedded Automotive Post Terminal | 4 EUT*
Embedded Universal Terminal | 5 LT
L-Terminal | 6 DT
Automotive Post & Stud Terminal | 7 UT
Universal Terminal | 8 AP
Automotive Post Terminal | 9 WNT
Wingnut Terminal | 10 DWNT
Dual Wingnut Terminal | 11 ST
Stud Terminal | 12
Cable & Plug |
|--|---|---|--|---------------------------|--|-----------------------------------|---|----------------------------------|---|-------------------------------|---------------------------|

*EUT Terminal Available Fall 2010



Trojan batteries are available worldwide through Trojan's Master Distributor Network. We offer outstanding technical support, provided by full-time application engineers.

For a Trojan Master Distributor near you, call 800.423.6569 or + 1.562.236.3000 or visit www.trojanbattery.com

12380 Clark Street, Santa Fe Springs, CA 90670 • USA